

INTEGRATED DOWNLIGHT



APPLICATIONS:


Commercial lighting

FEATURES:

- Available with silver reflector
- Easy installation
- Integrated over temperature protection
- Ingress protection IP20 rating
- 5 year warranty
- No UV and IR emission
- Mercury free

MATERIAL:

- Aluminum alloy and poly-carbonate

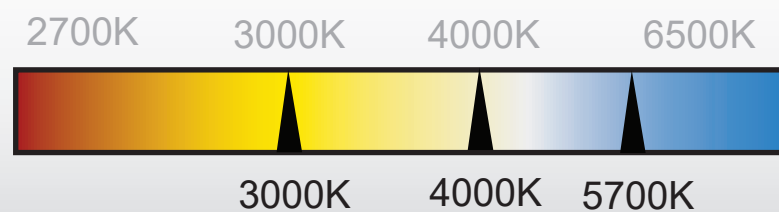

**COLOUR
SCALE:**

SPECIFICATIONS:

PRODUCT CODE:	18W	29W	38W	42W
Input voltage	AC 220V - 240V, 50Hz			
Power Factor	≥0.95 ± 10%			
CCT	3000K/4000K/5700K			
Efficacy**	90 Lm/W ± 10%	86 Lm/W ± 10%	90 Lm/W ± 10%	90 Lm/W ± 10%
Light output	1600 Lm ± 10%	2500 Lm ± 10%	3420 Lm ± 10%	3800 Lm ± 10%
CRI	≥80			
Beam angle	90°			
Driver type	Integrated			
Surge Rating	Line-Line > 1kV Line-GND > 2kV			
Operating environment	0°C - 40°C			
Dimmable	No			
Rated life*	30 000 Hours			
Product size	ø186 mm x H-90 mm		ø 218 mm x H-100 mm	
Cut-out hole	ø 170-175mm		ø 205-210mm	

*30 000 hours is the average performance under standard test condition based on 12 hours use per day. Actual performance may vary depending on usage and working conditions.

**CCT Dependant

