3 WIRE TRACK LIGHTS



APPLICATIONS:


Interior, commercial lighting, retail lighting, signage illumination

FEATURES:

- 3 Wire track-mount system
- IP20 rating
- Integrated over temperature protection
- Optional ceiling mountable base

MATERIAL:

- Aluminum alloy/plastic
- Adjustable bracket

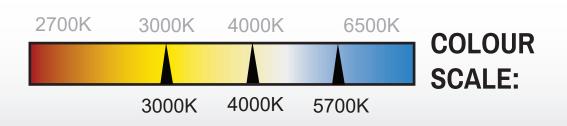

| SPECIFICATIONS: | 30W | | 40W | |
|---------------------------|------------------------------------|-------|-------|-------|
| Input voltage | AC 220V - 240V, 50Hz | | | |
| Power Factor | ≥0.95 | | ≥0.95 | |
| Optics | Dome | Lense | Dome | Lense |
| Efficacy (Lm/W ± 10%) | 75 | 80 | 70 | 78 |
| Light output** (Lm ± 10%) | 2200 | 2400 | 2500 | 2900 |
| CRI | ≥90 | | | |
| Beam angle | 10°, 25°, 45°,60°, 100° (Diffuser) | | | |
| Supply System | 3 Wire Track | | | |
| Product Size | ø 108mm x 150mm | | | |
| Weight | 740 g | | | |
| Operating environment | 0°C - 40°C | | | |
| Rated life* | 30 000 Hours | | | |

* 30 000 hours is the average performance under standard test condition based on
12 hours use per day. Actual performance may vary depending on usage and working conditions.
** CCT Dependant

