

T6 LED TUBE


0.6m; 0.9m; 1.2m; 1.5m



APPLICATIONS:

Ideal for parking lots, commercial lighting and billboards

- Crystal driver® technology
- Integrated over temperature protection
- Single sided AC supply
- T6 glass housing with no sagging
- 5 Year warranty
- Low flicker

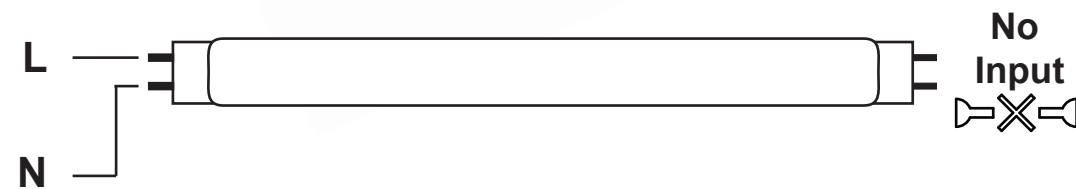


5
Year
Warranty

CCT
4000/
5700K

0.95
PF

CRI
≥ 80 Ra

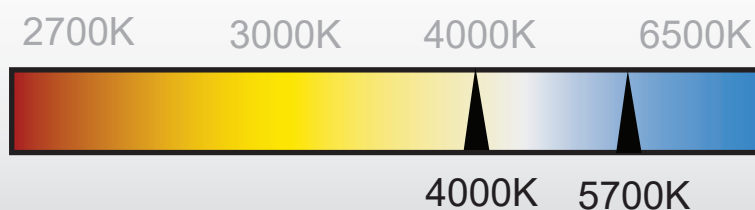

**COLOUR
SCALE:**

SPECIFICATIONS:

PRODUCT CODE:	600mm AZT09W06T6	900mm AZT14W09T6	1200mm AZT18W12T6	1500mm AZT22W15T6
Input voltage	AC 220V - 240V, 50Hz			
Total Power	9W	14W	18W	22W
CCT	4000/5700K			
Efficacy	110Lm/W ± 10%			
Light output	990Lm ± 10%	1540Lm ± 10%	1980Lm ± 10%	2420Lm ± 10%
CRI	≥80			
Beam angle	120°			
Power Factor	≥0.95			
Base	G5			
Surge Rating	≤1kV			
Operating environment	0°C - 40°C			
Dimensions (mm)	ø 19.2 x 549	ø 19.2 x 849	ø 19.2 x 1149	ø 19.2 x 1449
Rated life*	50 000 Hours			

*50 000 hours is the average performance under standard test condition based on 12 hours use per day. Actual performance may vary depending on usage and working conditions.

